





Specifications

No. of Cylinders		4
Bore x Stroke	mm (in)	87.0 x 92.4 (3.43 x 3.64)
Displacement	L (cu.in.)	2.197 (134.07)
Combustion System		E-TVCS
Intake System		Natural aspirated
Cooling System		Radiator cooling
Starter Capacity	V-A	12-1.4
Dry Weight	kg (lbs)	180.0 (396.8)

Industrial Use	Gross Intermittent	3600	kW (PS)	-
		3000		-
		2800		36.6 (49.7)
		2600		34.2 (46.6)
		2400		31.8 (43.3)
	2200	29.4 (39.9)		
	Net Intermittent	3600	kW (PS)	-
		3000		-
		2800		34.3 (46.7)
		2600		32.4 (44.0)
		2400		30.3 (41.2)
	2200	28.1 (38.2)		
	Net Continuous	3600	kW (PS)	-
		3000		-
		2800		29.8 (40.5)
2600		28.1 (38.2)		
2400		26.3 (35.8)		
2200	24.4 (33.2)			
Generator Use	Stand-by	3600	kW (PS)	-
		3000		-
		1800		24.2 (33.0)
		1500		20.1 (27.3)
	Continuous	3600	kW (PS)	-
		3000		-
		1800		20.2 (27.5)
		1500		17.2 (23.3)

*Specifications are subject to change without notice. *Dry weight is according to Kubota's standard specification. When specification varies, the weight will vary accordingly.

Performance Curve

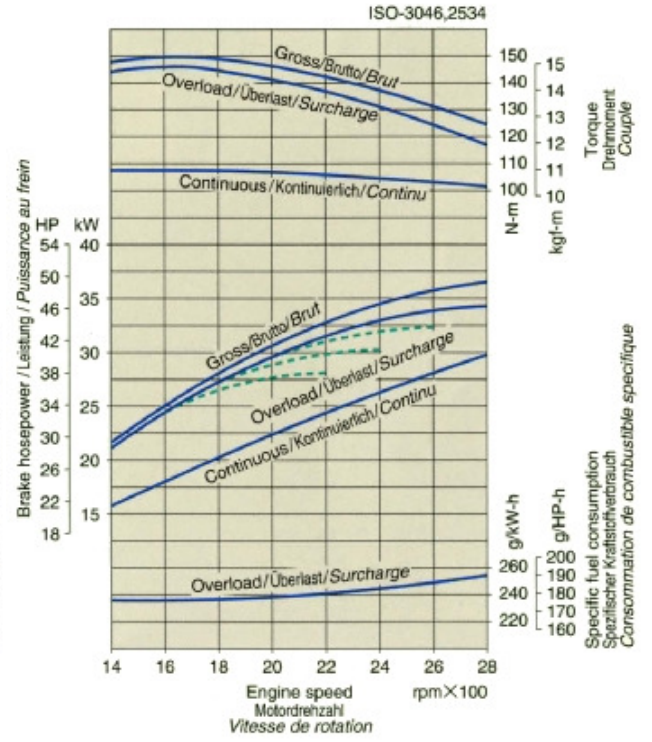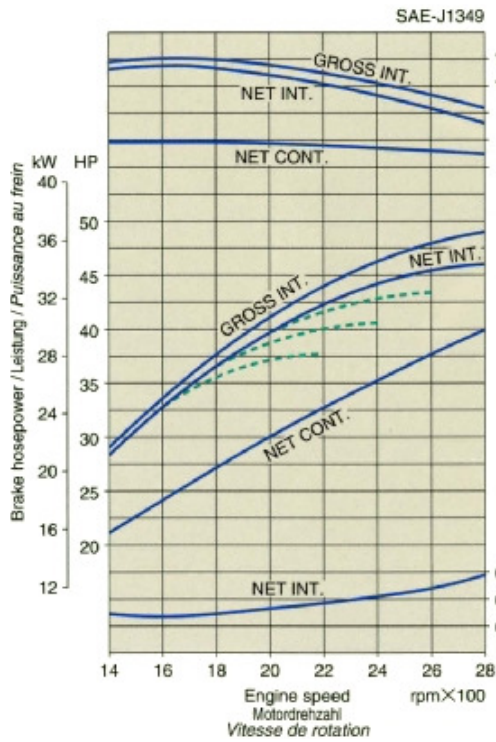

Dimensions mm (inch)

